

# OPERATOR TERMINAL

# Dialog 80



— RS232    RS422    RS485    CANBUS —



# SERAD

## Display

- 4x20 characters LCD display with backlight
- Display area 74x23 mm
- Character attributes : normal, blinking
- ASCII protocol

## Keyboard


- 28 keys with tactile feedback
- 4 dynamic function keys
- 6 re-legendable function keys with integrated leds
- Control and scrolling keys
- Help key
- Alarm key
- Numeric and alphanumeric keypad
- Buzzer

## Performances

- 16 bit processor
- 512 Kbyte FLASH memory
- 128 Kbyte non-volatile RAM
- RS232 serial communication port
- Optional RS422 or RS485 serial communication port
- Optional fieldbus : CANBUS

## Technical features

- 24Vdc supply voltage
- 4W power requirement
- 0 to 45°C operating temperature
- -20 to 70°C storage temperature
- Front panel protection IP65

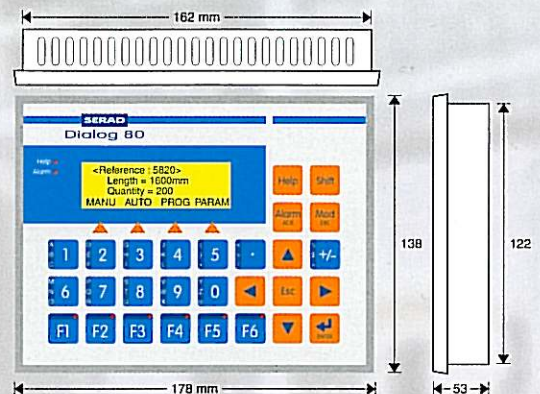

Distributor

## SERAD

271, Route des crêtes - 44440 TEILLE - FRANCE

Phone : 33 2 40 97 24 54 - Fax : 33 2 40 97 27 04

Internet : <http://www.serad.fr> - E-Mail : [info@serad.fr](mailto:info@serad.fr)

Subject to change without notice