

## SF series Motors - Connector pinout


### 230V motor – feedback BissC Posital encoder

Motor reference : SFxxAxxx**C8**0xxx

**A** : version 230V

**C8** : position sensor type BissC Posital encoder

**0** : motor without brake

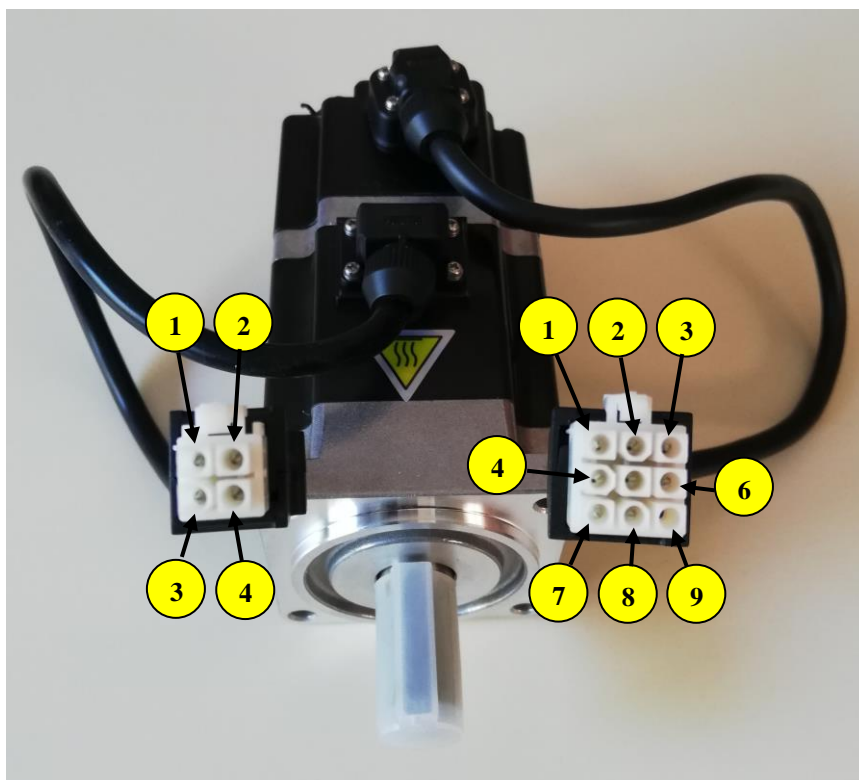

Power - 4-point connector		
Pin	Name	Description
1	U	Motor phase U
2	V	Motor phase V
3	W	Motor phase W
4	PE	Protective Earth

Encoder - 9-point connector		
Pin	Name	Description
1	PE	Protective Earth
2	5V	+5Vdc
3	0V	GND
4	MA+	Clock +
5	MA-	Clock -
6	SLO+	Data +
7	SLO-	Data -
8		Not connected
9		Not connected